

**Features:**

- 175-240V AC input
- Single Output
- 85% high efficiency
- 100% full load bur-in test
- Protection: OTP,OLP,OVP,SCP
- CE ROHS Certified
- 3 year warranty

Applications:


- Indoor LED lighting
- LED office lighting
- LED commercial lighting
- LED decorative lighting

**Specifications**


| Product Code | | EPS350-W1V12 | EPS350-W1V24 |
|--------------|-----------------------------|---|--------------|
| Output | DC Voltage | 12V | 24V |
| | Rated Current | 29.1A | 14.6A |
| | Current Range | 0~29.1A | 0~14.6A |
| | Voltage tolerance | ±5% | ±5% |
| | Rated Power | 350W | 350W |
| | Ripple & Noise | <150mVp-p | <150mVp-p |
| | Set-up, Rise , Hold-up Time | 1500ms, 50ms , 20ms | |
| Input | Input voltage range | 100V~135V AC/175V~240V AC | |
| | Frequency Range | 50~60Hz | |
| | AC Current | 6A/AC 115V, 3A/AC 230V | |
| | Efficiency | 85% | 88% |
| | PF | 0.6 | |
| Protection | Over Load | Above 105%-120% of rated power | |
| | | Shut-down output voltage, auto recovery after fault condition is removed | |
| | Over Voltage | Above Max. Voltage (105% of rated voltage) | |
| | | Shut-down output voltage, auto recovery after fault condition is removed | |
| | Over Temperature | Over 105°C detected on main IC control | |
| Ambiant | Working Temp. & humidity | "-20°C~+60°C, 20%~90%RH | |
| | Storage temp. & humidity | "-40°C~+85°C, 10%~95%RH | |
| Tesings | Withstand voltage | I/P-O/P: 1.5KVAC/1min; I/P-F/G: 1.5KVAC/1min; O/P-F/G: 0.5KVAC/1min; | |
| | Safety | GB4943 ;IEC60950-1;EN62368-1; | |
| | EMC | EN 55032:2015+A11:2020 EN IEC 61000-3-2:2019+A1:2021 EN 61000-3-3:2013+A2:2021 EN55035:2017+A11:2020 | |
| | LVD | EN60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013 | |
| Others | Demension(L*W*H) | 198*98*40mm | |
| | Packing | 0.64kg/pcs, 32pcs/20.5kg/CTN | |

Mechanical Structures

Side View

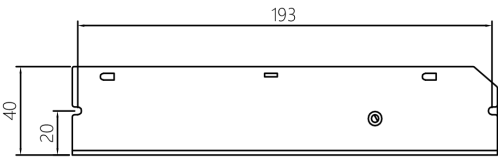


Vertical view

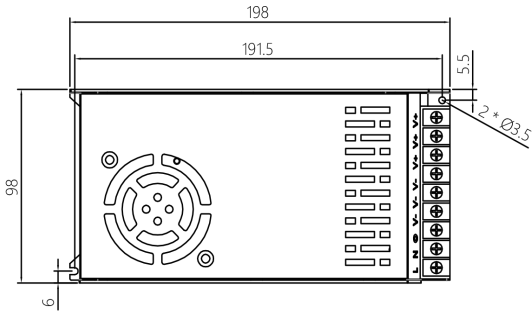


Wiring Diagram


1. Without Dimming

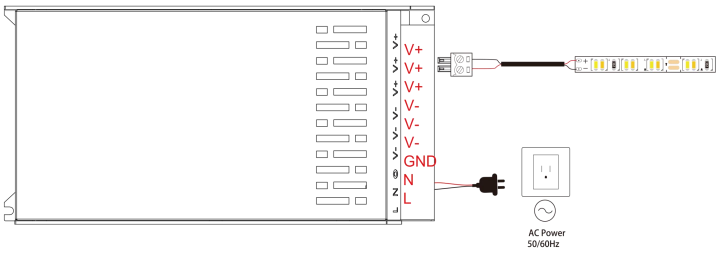


2. With Dimming

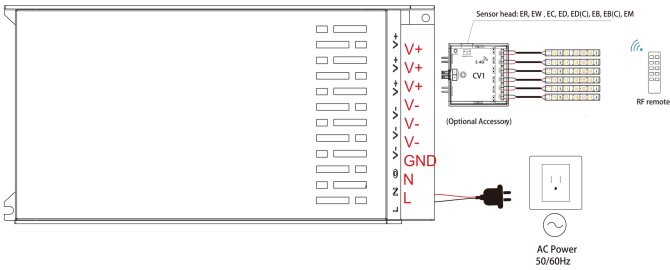

Drating Curve

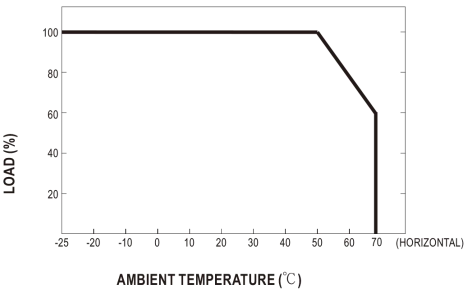

Static characteristic

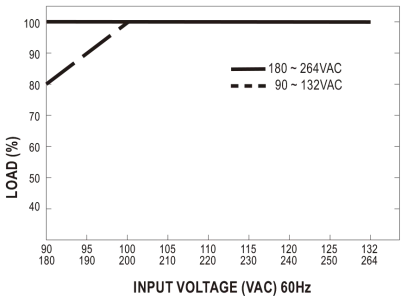

Notes:

1. The above mentioned data were measured at 230VAC input and 25°C.
2. Dis-connect the AC input before checking any mal-phenomenons.
3. Make sure the INPUT&OUPUT were in right situation before connected to power supply.
4. Datesheet for reference only. We suggest you take sampling before mass orders.